


DRYCASTING RIGS
AS PER AAA(WA DIVISION) INC., DRYCASTING RULES AS AT SEPTEMBER 2018.

56 and 112 gram Level Line Distance Casting Rig

Leader to be a minimum of 20 kg and a maximum of 50 Kg and to be no more than 350mm long measured from the sinker loop to the swivel.


Casting weights to be > 56 g, or >112 g



Tubing to be a soft, flexible fluorescent pink plastic and to be a minimum of 200 mm long and maximum of 250 mm Diameter of tubing to be a minimum of 2.5 mm inside diameter and a maximum of 4.5 mm outside diameter.

Double Handed Accuracy Rig

Leader to be a minimum of 25 kg and a maximum of 50 Kg breaking strain and no more than 250 mm long measured from the sinker loop to the swivel. Casting weight to be no heavier than 112 g

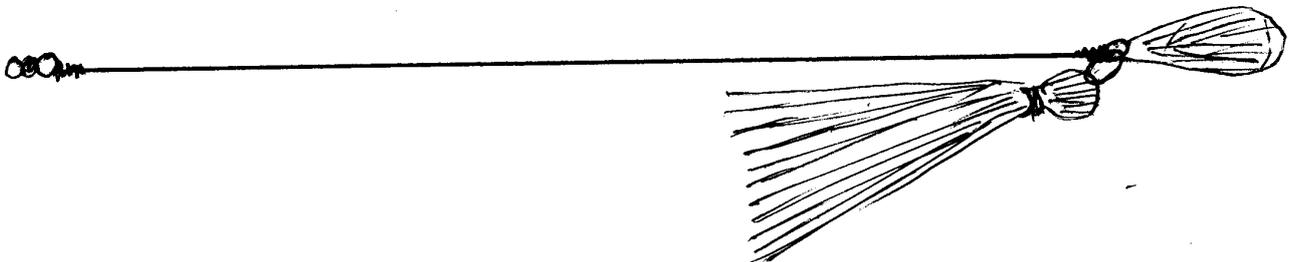


Pompom shall be;
a minimum of 50 mm long
a maximum of 100 mm long
comprise of a minimum of 30 strands,
made up of 8 ply wool or equivalent
dark in colour

Artificial Bait Rig

Tubing to be a soft, flexible fluorescent pink plastic and to be a minimum of 200 mm long and maximum of 250 mm Diameter of tubing to be a minimum of 2.5 mm inside diameter and a maximum of 4.5 mm outside diameter.

Sinker leader to be less than 1 000 mm measured from the sinker loop to the swivel, and to be a minimum of 25 kg maximum of 50 Kg. Weight shall be up to 112 g

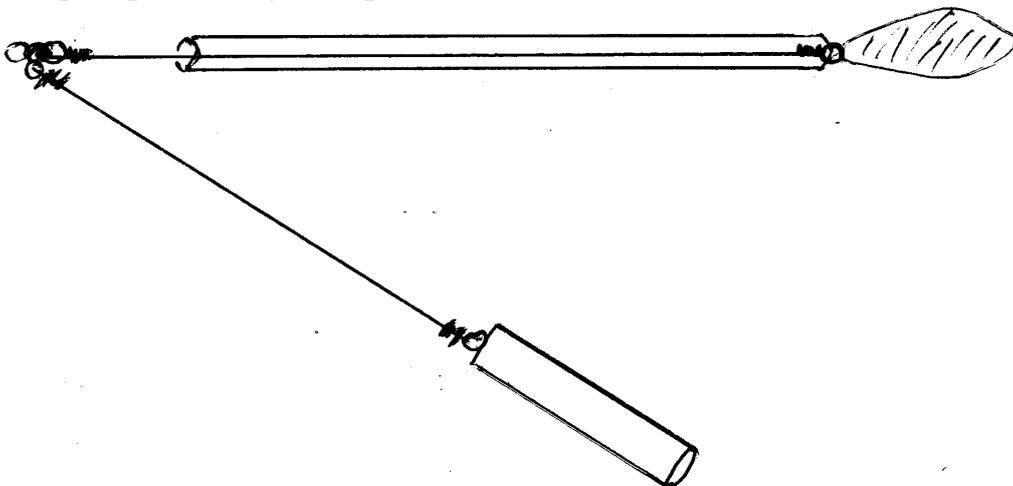

Dowel leader to be a minimum of 25 kg maximum of 50 kg breaking strain and shall be no less than 230 mm long.
Artificial bait shall be 90 mm long and 13 mm in diameter and made of wooden dowelling. It may be attached to a swivel, ring or dropper loop by a line
Weight shall hang completely below the dowel.
Note: No modifications to the dowel are allowed other than painting for identification